



ALLIED INNOVATIONS, LLC



Manufacturing the Product Lines of Len Gordon
7215 Bermuda Rd Las Vegas NV 89119-4304
Phone (702) 361-0600 Fax (702) 361-0613

#4 BUTTON

Designed for fiberglass, wood, gunite, and jetted spa applications. Up to 75-foot control distance with relay-operated controls.


MANY COLORS TO CHOOSE FROM!

Black Brown Bone-Beige White

Metal Finishes available:

Chrome Polished Brass

Gunite button available only in White or Black.

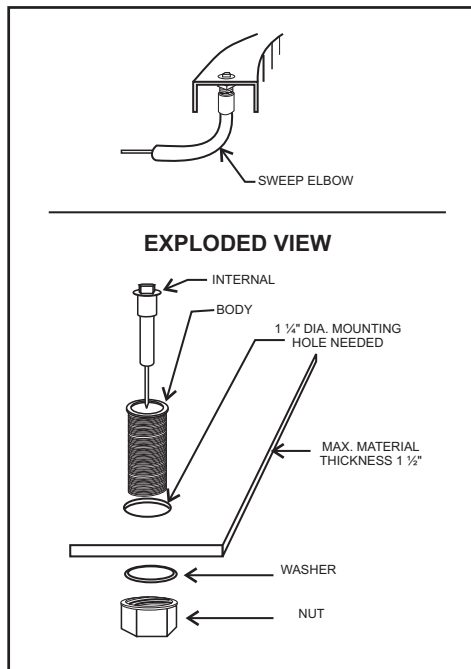


CAUTION:

Make sure vinyl tubing is free of kinks and protected from any rough edges or heater equipment. If tubing is to be routed outside of spa enclosure, install the tubing in a non-conductive conduit between the air button and the control. Use sweep elbows or form large-radius curves in the pipe with a heat gun. Flexible pipe may also be used. Do not use 90° elbows. Install only with non-conductive 1/8" I.D. vinyl tubing. Do not allow water or foreign materials to enter the tubing.

NOTE:

Blowing into tubing introduces condensation from your breath. If the tubing must be blown out, use dry compressed air.

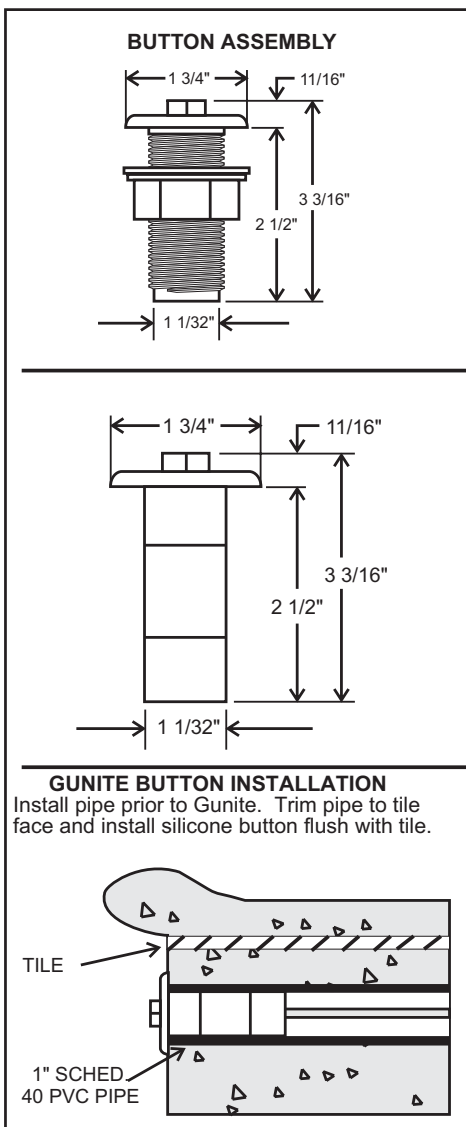

READ AND SAVE THESE INSTRUCTIONS